


AD-A252 219



DDOPOPHM/USA/DDO/NADTR92105

2

PERFORMANCE ORIENTED PACKAGING TESTING
OF
WOOD BOX
FOR
MK 2 MOD 1 ACOUSTIC DEVICE COUNTERMEASURE

BY:

KERRY J. LIBBERT

MECHANICAL ENGINEER

Performing Activity:
Crane Division
Naval Surface Warfare Center
Crane, Indiana 47522-5000

DTIC
SELECTE
JUN 29 1992
S B D

MAY 1992

FINAL

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED.

Sponsoring Organization:
Naval Weapons Station Earle
Program Management Office - Code 50
Colts Neck, New Jersey 07722-5000

92 6 26 031

92-16919





Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

Prepared by:

K. J. Libbert
K. J. Libbert

Reviewed by:

R. F. Sanders
R. F. Sanders

Reviewed by:

J. W. Puckett
J. W. Puckett

Approved by:

D. N. Montgomery
D. N. Montgomery

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)

2. REPORT DATE

5-92

3. REPORT TYPE AND DATES COVERED

Final

4. TITLE AND SUBTITLE

Performance Oriented Packaging Testing of Wood Box for
MK 2 MOD 1 Acoustic Device Countermeasure

5. FUNDING NUMBERS

6. AUTHOR(S)

Kerry J. Libbert

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

Crane Division
Naval Surface Warfare Center
Code 4045
Crane, IN 47522-5040

8. PERFORMING ORGANIZATION
REPORT NUMBER

DODPOPHM/USA/DOD/
NADTR 92105

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

Crane Division
Naval Surface Warfare Center
Code 7051
Crane, IN 47522-5070

10. SPONSORING/MONITORING
AGENCY REPORT NUMBER

11. SUPPLEMENTARY NOTES

12a. DISTRIBUTION/AVAILABILITY STATEMENT

Unlimited Distribution

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

The PPP-B-601 Wood box used to transport the MK2 MOD 1 Acoustic Countermeasure was tested for conformance to Performance Oriented Packaging criteria established by the United Nations Recommendations on the Transport of Dangerous goods and Code of Federal Regulations 49 CFR. The box was tested with a gross weight of 165 pounds (75 kilograms) and met all requirements.

14. SUBJECT TERMS

Performance Oriented Packaging
MK 2 MOD 1 Acoustic Device, Countermeasure

15. NUMBER OF PAGES

6

16. PRICE CODE

17. SECURITY CLASSIFICATION
OF REPORT

Unclassified

18. SECURITY CLASSIFICATION
OF THIS PAGE

Unclassified

19. SECURITY CLASSIFICATION
OF ABSTRACT

Unclassified

20. LIMITATION OF ABSTRACT

U

GENERAL INSTRUCTIONS FOR COMPLETING SF 298

The Report Documentation Page (RDP) is used in announcing and cataloging reports. It is important that this information be consistent with the rest of the report, particularly the cover and title page. Instructions for filling in each block of the form follow. It is important to **stay within the lines** to meet optical scanning requirements.

Block 1. Agency Use Only (Leave blank).

Block 2. Report Date. Full publication date including day, month, and year, if available (e.g. 1 Jan 88). Must cite at least the year.

Block 3. Type of Report and Dates Covered. State whether report is interim, final, etc. If applicable, enter inclusive report dates (e.g. 10 Jun 87 - 30 Jun 88).

Block 4. Title and Subtitle. A title is taken from the part of the report that provides the most meaningful and complete information. When a report is prepared in more than one volume, repeat the primary title, add volume number, and include subtitle for the specific volume. On classified documents enter the title classification in parentheses.

Block 5. Funding Numbers. To include contract and grant numbers; may include program element number(s), project number(s), task number(s), and work unit number(s). Use the following labels:

C - Contract	PR - Project
G - Grant	TA - Task
PE - Program Element	WU - Work Unit Accession No.

Block 6. Author(s). Name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. If editor or compiler, this should follow the name(s).

Block 7. Performing Organization Name(s) and Address(es). Self-explanatory.

Block 8. Performing Organization Report Number. Enter the unique alphanumeric report number(s) assigned by the organization performing the report.

Block 9. Sponsoring/Monitoring Agency Name(s) and Address(es). Self-explanatory.

Block 10. Sponsoring/Monitoring Agency Report Number. (If known)

Block 11. Supplementary Notes. Enter information not included elsewhere such as: Prepared in cooperation with...; Trans. of...; To be published in.... When a report is revised, include a statement whether the new report supersedes or supplements the older report.

Block 12a. Distribution/Availability Statement. Denotes public availability or limitations. Cite any availability to the public. Enter additional limitations or special markings in all capitals (e.g. NOFORN, REL, ITAR).

DOD - See DoDD 5230.24, "Distribution Statements on Technical Documents."

DOE - See authorities.

NASA - See Handbook NHB 2200.2.

NTIS - Leave blank.

Block 12b. Distribution Code.

DOD - Leave blank.

DOE - Enter DOE distribution categories from the Standard Distribution for Unclassified Scientific and Technical Reports.

NASA - Leave blank.

NTIS - Leave blank.

Block 13. Abstract. Include a brief (*Maximum 200 words*) factual summary of the most significant information contained in the report.

Block 14. Subject Terms. Keywords or phrases identifying major subjects in the report.

Block 15. Number of Pages. Enter the total number of pages.

Block 16. Price Code. Enter appropriate price code (*NTIS only*).

Blocks 17. - 19. Security Classifications. Self-explanatory. Enter U.S. Security Classification in accordance with U.S. Security Regulations (i.e., UNCLASSIFIED). If form contains classified information, stamp classification on the top and bottom of the page.

Block 20. Limitation of Abstract. This block must be completed to assign a limitation to the abstract. Enter either UL (unlimited) or SAR (same as report). An entry in this block is necessary if the abstract is to be limited. If blank, the abstract is assumed to be unlimited.

INTRODUCTION

A packaging method for the MK2 Mod 1 Acoustic Countermeasure Device was tested to ascertain whether the container would meet the requirements of Performance Oriented Packaging (POP) as specified by the United Nations Recommendations on the Transport of Dangerous Goods Document, ST/SG/AC.10/1, Revision 6, Chapters 4 and 9. A base level vibration test was also conducted in accordance with the rulings specified by the Department of Transportation Performance Oriented Packaging Standards, 49 CFR Part 106 et al. Federal Register/Vol. 56, No. 245/Friday, December 20, 1991/Rules and Regulations. The objectives were to evaluate the adequacy of the container in protecting and retaining the devices when secured with appropriate dunnage.

Eight MK2 Mod 1 Acoustic Devices, Countermeasure are packaged in a PPP-B-601 cleated plywood box, with polyurethane foam dunnage. The box is shown in Figure 1 with the lid and top cushion removed and one device in place. The box is closed for shipment in accordance with PPP-B-601, using nails only. The box was tested without straps or banding.

TESTS PERFORMED

1. Drop Test


This test was performed in accordance with ST/SG/AC.10/1, Chapter 9, Paragraph 9.7.3. Five containers were used during the test series, one for each drop. The drop height was 1.2 meters and the drop sequence was as follows:

- a. Flat on Bottom
- b. Flat on Top
- c. Flat on Long Side
- d. Flat on Short Side
- e. On a Corner

The test was performed at ambient temperature ($70^{\circ} + 20^{\circ}\text{F}$). The contents of the container should be retained within its packaging and exhibit no damage liable to affect safety during transport.

2. Stacking Test

This test was performed in accordance with ST/SG/AC.10/1, Chapter 9, Paragraph 9.7.6. Three different containers were used, each with a stack weight of 2325 pounds. This weight represents the load superimposed on the bottom container of a sixteen-foot stack of like containers weighing 165 pounds each. The test was performed for 24 hours. After the allowed time, the weight was removed and the container examined. Any leakage, deterioration, or distortion which could adversely affect transport or reduce its strength or cause instability in stacks of packages is cause for rejection.

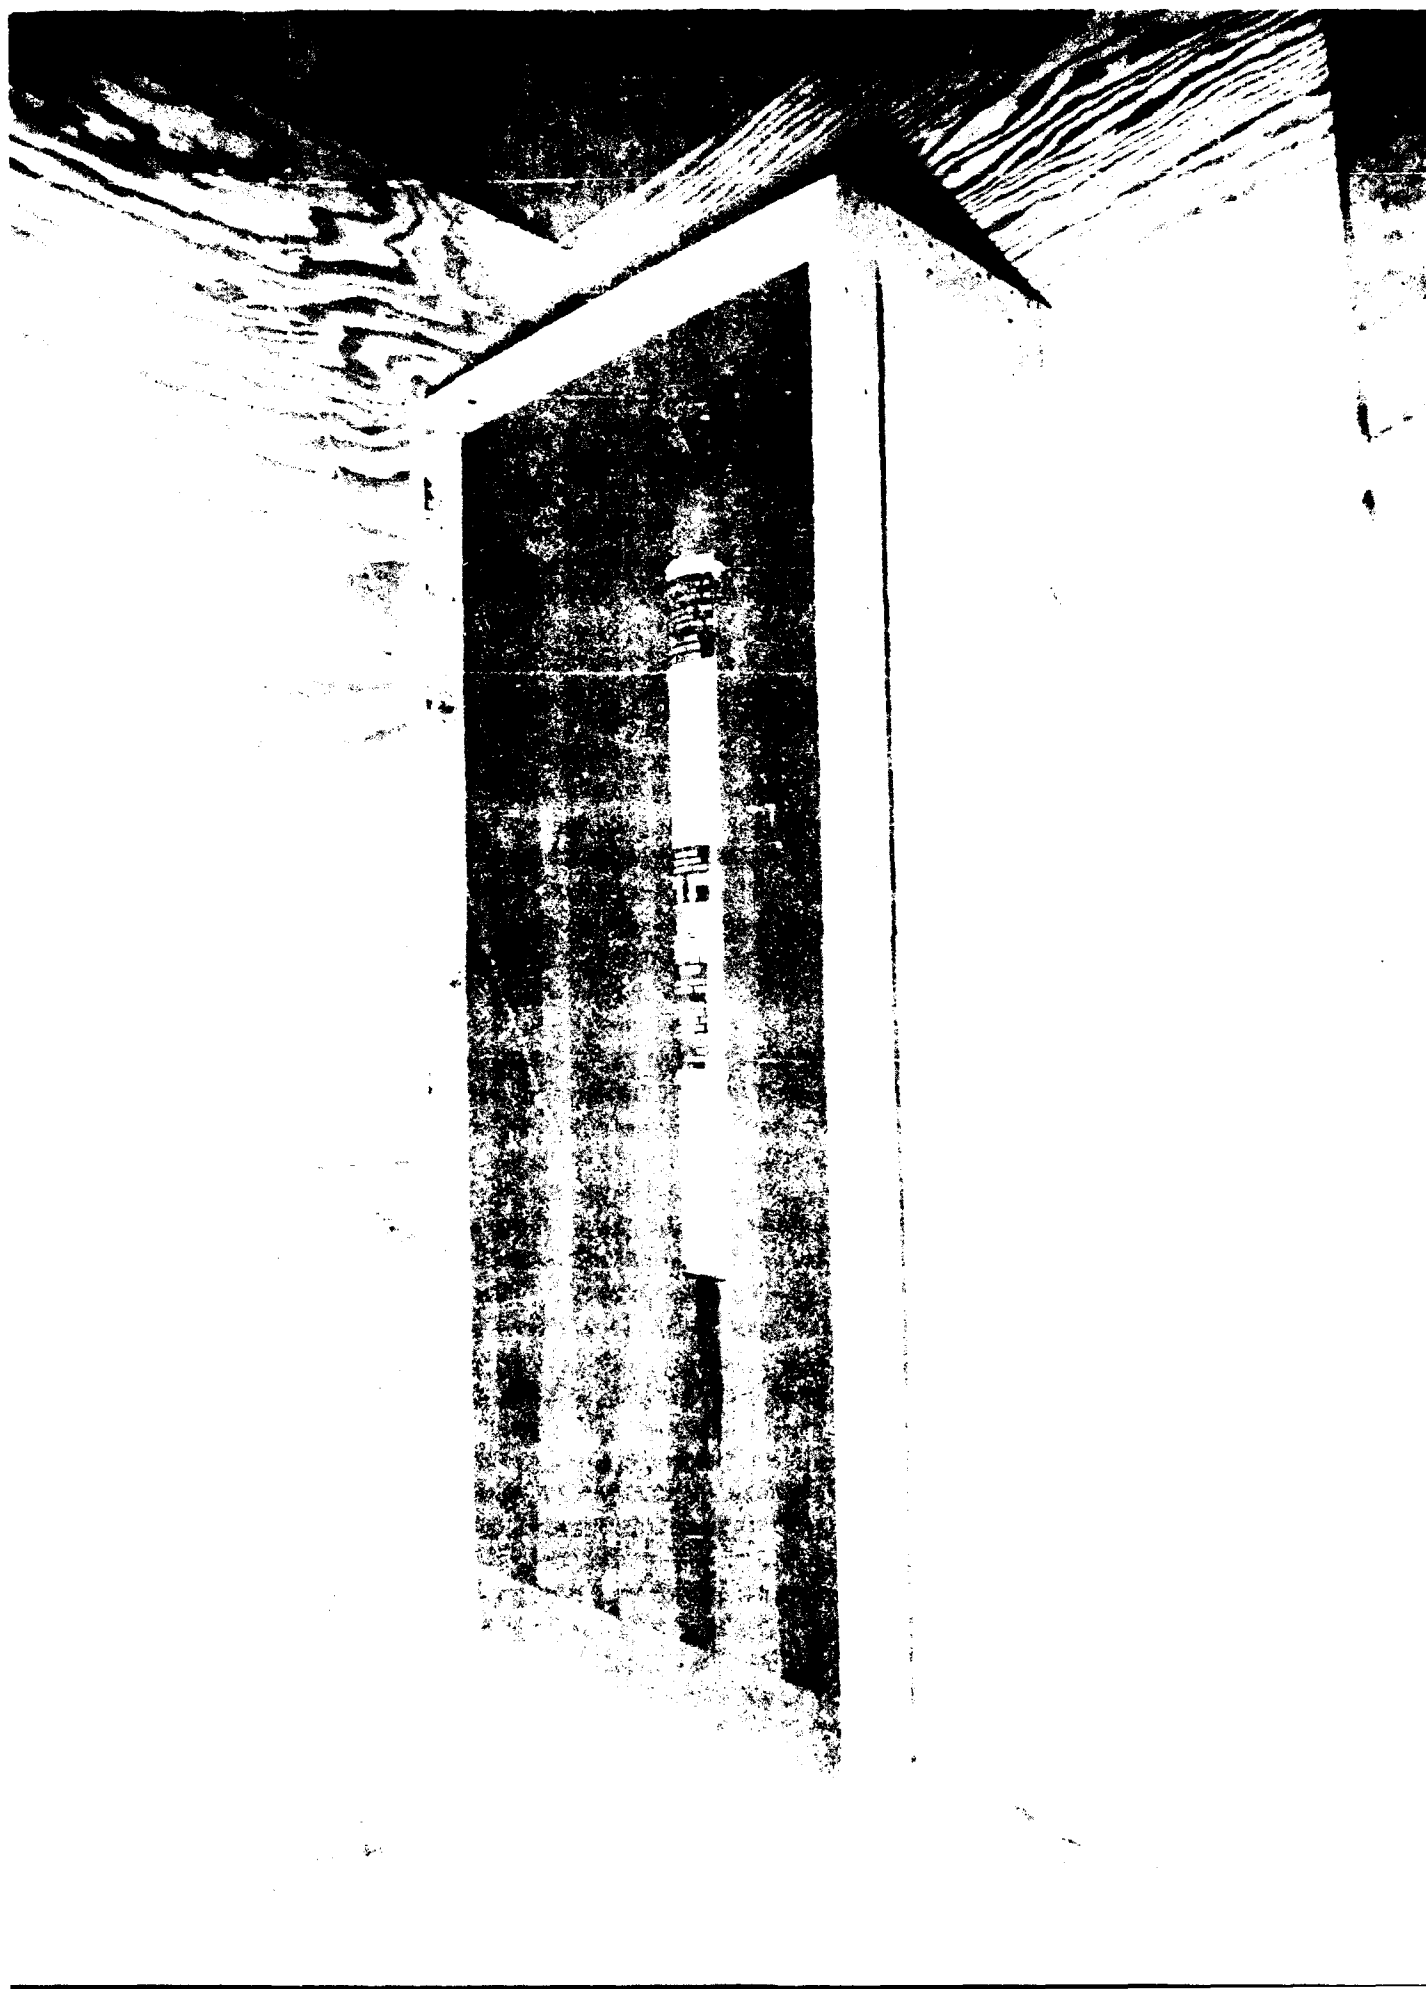

3. Base Level Vibration Test

This test was performed in accordance with the Federal Register/Vol 56, No. 245/Friday, December 20, 1991/Rules and Regulations. Three sample containers were loaded with aluminum rods and closed as for shipment. Each container was placed on a vibrating platform that had a vertical double-amplitude (peak-to-peak) displacement of one inch. The packages were constrained horizontally to prevent them from falling off the platform, but were free to move vertically, bounce and rotate. The test was performed for one hour at a frequency that caused each point of the container bottom to be raised from the platform to such a degree that a 1.6mm thick metal strip could be passed between the bottom of any package and the platform.

PASS/FAIL (UN CRITERIA)

The criteria for passing the drop test is outlined in Paragraph 9.7.3.5 of ST/SG/AC.10/1 and states the following: "Where a packaging for solids undergoes a drop test and its upper face strikes the target, the test sample passes the test if the entire contents are retained by an inner packaging or inner receptacle (e.g., a plastic bag), even if the closure is no longer sift-proof".

The criteria for passing the stacking test is outlined in Paragraph 9.7.6.3 of ST/SG/AC.10/1 and states the following: "No test sample should show any deterioration which could adversely affect transport safety or any distortion liable to reduce its strength or cause instability in stacks of packages".

PASS/FAIL (FEDERAL REGISTER CRITERIA)

The criteria for passing the Base Level Vibration Test is outlined in the Federal Register/Vol. 56, No. 245/Friday, December 20, 1991/Rules and Regulations and states the following: "Immediately following the period of vibration, each package shall be removed from the platform, turned on its side and observed for any evidence of leakage. A packaging passes the vibration test if there is no rupture or leakage from any of the packages. No test sample should show any deterioration which could adversely affect transportation safety or any distortion liable to reduce packaging strength."

TEST RESULTS

1. Drop Test

Satisfactory.

2. Stacking Test

Satisfactory.

3. Base Level Vibration Test

Satisfactory.

DISCUSSION

1. Drop Test

After each drop the container was inspected for any damage which would be cause for rejection. Final inspection revealed minor damage to the boxes, but no spillage of contents.

2. Stacking Test

Three containers were individually tested. Each container was visibly inspected after the 24-hour period was over. There was no leakage, distortion, or deterioration to the container as a result of this test.

3. Base Level Vibration Test

Immediately following the vibration test, each container was removed from the platform, turned on its side and observed for any evidence of leakage. All lids remained fastened and there was no evidence of leakage of contents.

REFERENCE MATERIAL

United Nation's "Recommendations on the Transport of Dangerous Goods", ST/SG/AC.10/1, Revision 6

Department of Transportation Performance Oriented Packaging Standards, 49 CFR Part 106 et al. Federal Register/Vol. 56, No. 245/Friday, December 20, 1991/Rules and Regulations

DISTRIBUTION LIST

Commander
Crane Division
Naval Surface Warfare Center
Code 4045 and Code 7051
Crane, IN 47522-5000

Commanding Officer
Naval Weapons Station Earle
Code 50 and Code 50232
Colts Neck, NJ 07722-5000

Defense Technical Information Center (2 copies)
ATTN: DTIC/FDAC (Virginia Guidi)
Bldg. 5, Cameron Station
Alexandria, VA 22304-6145

Commander
U.S. Army Armament, Research, Development and Engineering
Center
SMCAR-ESK
Rock Island, IL 61299-7300

Defense General Supply Center
DDRV-TMPA (Dave Gay)
Richmond, VA 23297-5000

DATA SHEET

CONTAINER:

PPP-B-601 Cleated Plywood
Box for MK2 Mod 1 Acoustic
Device, Countermeasure

POP MARKING:

4C1/Y75/S/**
USA/DOD/NAD

Type: 4C1

UN Code: 9

Specification Number:
PPP-B-601

Material:
Wood

Gross Weight:
75.0 kg
(165.0 pounds)

Dimensions:
1.2 m L x .55 m W x .32 H
(48.0" L x 21.5" W x 12.6" H)

Closure (Method/type):
Nails

Tare Weight:
16.8 kg
(37.0 pounds)

Additional Description: Box in accordance with PPP-B-601,
Overseas Type, Style 1, Grade A.

PRODUCTS:

MK2 Mod 1 Acoustic Device, Countermeasure
NSN not assigned

Proper Shipping Name: LITHIUM BATTERIES CONTAINED
IN EQUIPMENT

United Nations Number: 3091

United Nations Packing Group: II

Physical State: Solid

Amount Per Container: 8

Net Weight: 7.7 kg (lbs.)

TEST PRODUCT:

Name: Aluminum Rods
Physical State: Solid

Size: 2.75" DIA x 26.62" L

Quantity: 8

Dunnage: Foam polyurethane
Gross Weight: 75.0 kg (165.0 lbs.)